



Construction Update - June 18, 2022


This week, the contractor drove metal sheeting to construct a cofferdam on the south side of Crystal Creek, west of Main Street. The cofferdam will create a dry construction area while the construction crew works to implement channel improvements.

Over the next two weeks, the contractor will begin excavation and preparation for the concrete foundation. This foundation will support the new Redi Rock block retaining wall on the south side of Crystal Creek, west of Main Street.

Utility companies will also continue working to transfer existing customers to the new infrastructure on S. Harrison Street.



Cofferdam Construction

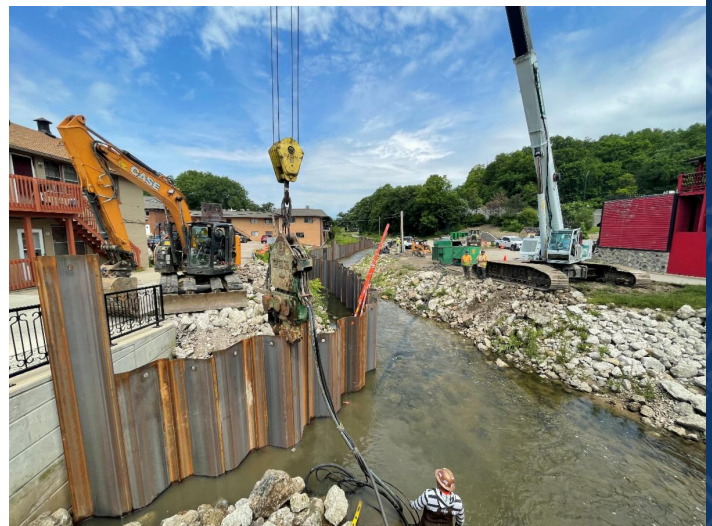

WHAT ARE *Cofferdams*?

cof·fer·dam

/ˈkɒfər,dam


a watertight enclosure pumped dry to permit construction work below the waterline, as when building bridges



COFFERDAMS CREATE DRY
CONSTRUCTION WORK AREAS



COFFERDAM BUILT AT
MAIN STREET

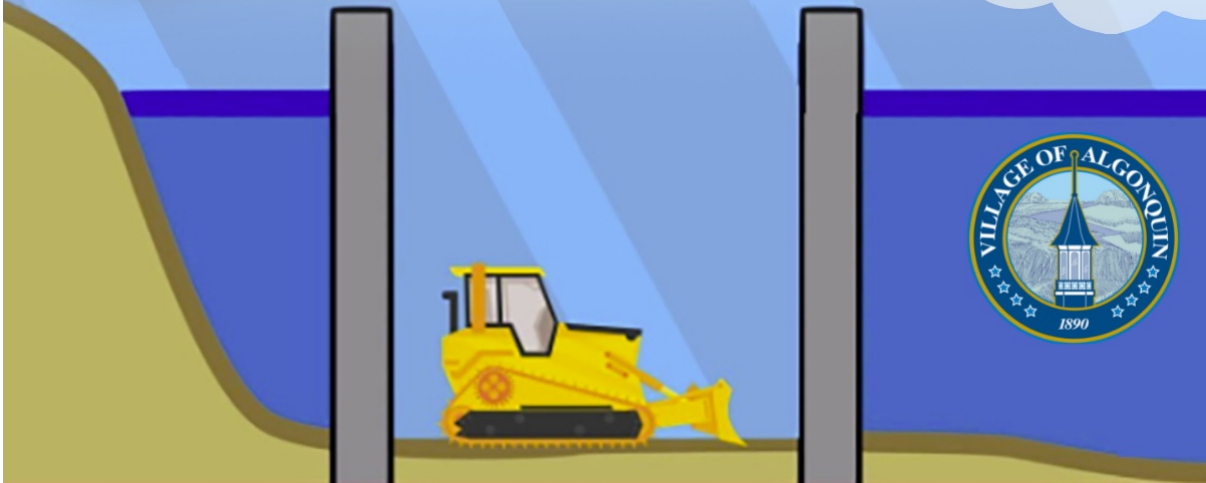

Stage 1

WINTER 2021 - SUMMER 2022

Harrison Street Bridge Reconstruction
Riverwalk Construction & Parking
Crystal Creek Improvements
Historic Village Hall Parking Lot Reconstruction

Stage 2

SPRING 2022 - FALL 2022

20 W. Washington Street Parking Lot Construction

Stage 3

SPRING 2023 - FALL/WINTER 2023

Washington Street Streetscape
Harrison Street Streetscape
Harrison Street Utility Undergrounding
Downtown Streets Resurfacing

Stage 4

FALL 2023 - SPRING 2024

Village Parking Lot Resurfacing

Stage 5

FALL 2023 - SPRING 2024

Downtown Parking Concept Plan



Sign up for
Email Updates

